

# FLUXCLEAN SD (PP)


## Manually operated maintenance cleaning system

FLUXCLEAN SD (standard duty) has three chambers made from welded polypropylene (PP).



### APPLICATION

- Cleaning condensation traps, filters from reflow ovens
- Cleaning solder pallets
- Cleaning dust and other contamination from handling
- Mechanical parts cleaning

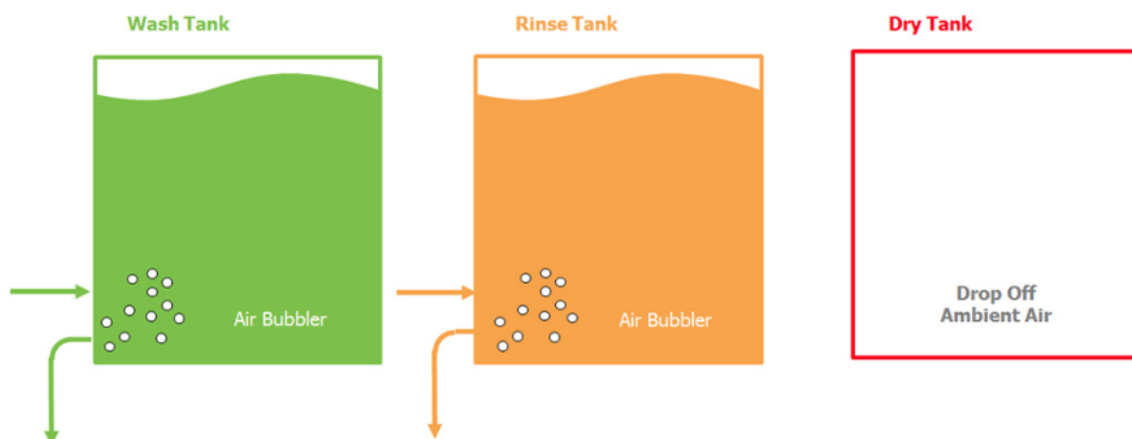

## Technical data

Dimension (L x W x H):	1650 x 1 065 x 1 100 mm
Weight:	145 kg (w/o filling)
Usable space of chamber (L x W x H):	750 x 500 x 435 mm
Volume:	163 ltr
Temperature:	Ambient
Recommended cycle time:	30 min. (cleaning) 10 min. (rinsing)
Air pressure supply:	0,4-0,8 MPa consumption 30 l/min.
Compressed air connection:	Hose - inner diameter $\varnothing=13$ mm (G1/2")

## Installation

**The following service and maintenance area is required:**

- From the front side of appliance - minimal 1,2 m - space for appliance operation
- The left side - accessing area to discharge ball valves
- From the rear side - minimal 0,5 m - space for maintenance

## Dimensions

